

Flo-Mod Easy Sew Face Mask Templates

How-to video at digitalwood.com/flo-mod

|  How-to video at digitalwood.com/flo-mod Made in USA Mask Size | Finished Mask Measurements Using 1/4" seam allowance** | | Elastic and Tie Size | | |
|---|--|--|---|--|--|
| | Mask Height  | Mask Curve Length* (Measure face with mouth half open)  | Earloops Suggested Length Use 1/8" or 3/16" Elastic (Add 2" for open tie or toggle tail) | Head Elastic Use 1/4" Elastic T-Top at back of head B-Bottom Behind the Neck (Add 2" for open tie or toggle tail) T B | Fabric Ties Cut 2" wide strips Fold and sew to 1/2" wide or use ribbon |
| Adult Large | 6-1/2" (6.57) | 7-1/4" (7.2) | 8-3/4" Cut 2 | 16" 12" | 15" Cut 4 |
| Adult Medium | 6" (6.07") | 6-5/8" (6.65) | 7-3/8" Cut 2 | 15-1/4" 11" | 15" Cut 4 |
| Adult Small | 5-1/2" (5.52) | 6"(6.04) | 6" Cut 2 | 14-1/2" 10" | 15" Cut 4 |

*Measure with mouth half open (as in speech) from nose bridge to just under your chin bone.


This mask pattern hugs the bottom of your chin.

**A 1/4" seam allowance is already added on each template. A larger 3/8" seam allowance can be used for in-between sizing.


1. Cut 4

Trace around outside edge of template and cut. OR stack fabric with good sides together and use the template to rotary cut.

For best results on the concave edge of the mask, angle your rotary cutter slightly.




OR

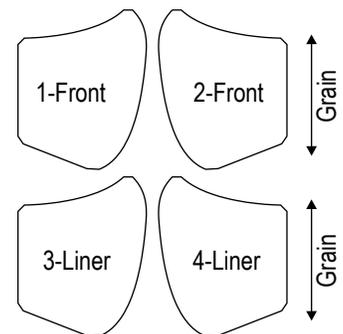

2. Sew


Join the curved seam that is center of the mask by placing the "good" sides together and sewing them with 1/4" seam allowance.

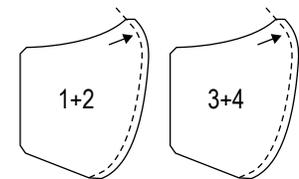

3. Optional Filter Pocket-Cut 2


Mark filter pocket. Trace around outside edge of template and cut OR stack fabric and use the template to rotary cut.

Remove template and finish cutting along filter pocket markings.

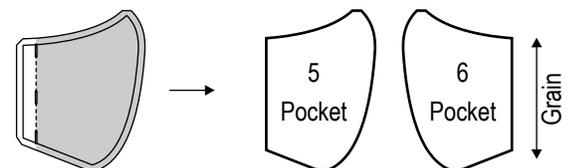


3B. Optional Filter Pocket- Sew

Fold edge of filter pocket 1/4" on back side of fabric. Press and sew down the center of fold. Join the curved seam that is center of the mask by placing the "good" sides together with the folded seams out and sew together with 1/4" seam allowance.

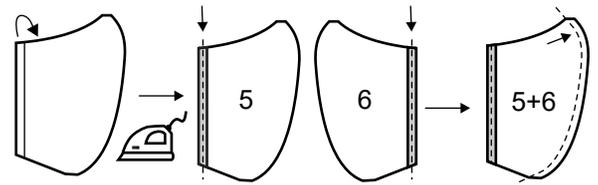


Fold over 1/4", Press and sew


4. Open, Stack Layers and sew along top and bottom.

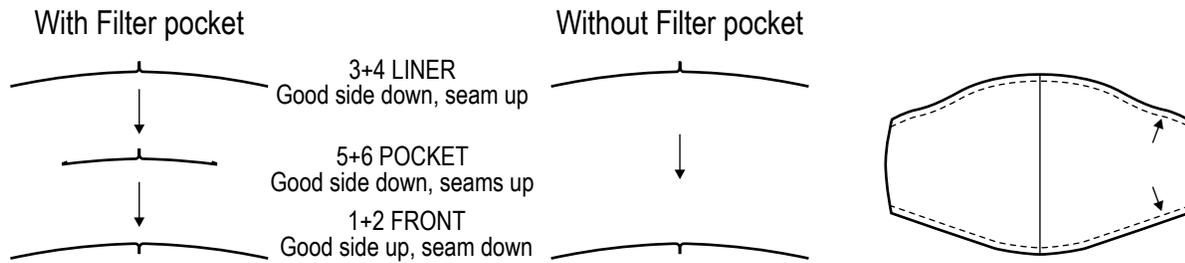

5. Turn right side out, Press, Insert nose wire and sew nose wire guide

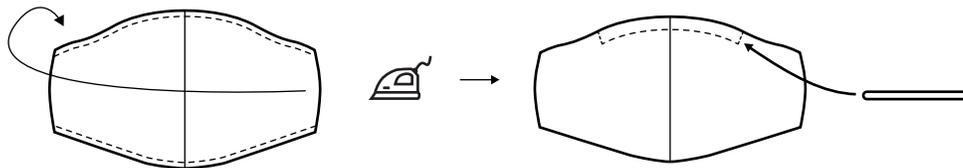

5. Fold edges in 1/4". Insert ties or elastic and sew edges

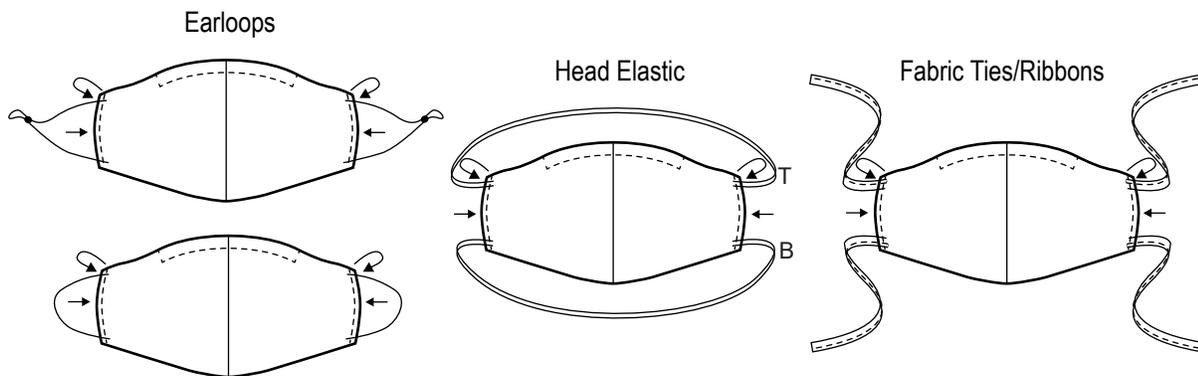

6. Adjust for fit and add a pleat if you have a gap near the ear

Fold (1) and stitch (2) to add a pleat if needed for fit

